


Revisión: Review:	01	FICHA TECNICA / DATA SHEET	Código: Code:
Fecha: Date:	25-02-15	INTERRUPTOR DE PRINCIPAL / RESERVA	Nº F.Técnica/Fichero: Data Sheet No./File:
Hoja: Sheet:	1/1	MAIN / RESERVE SWITCH	Sistema de Extinción: Extinguish System:
			POLIVALENTE

Descripción
Description Este interruptor de principal / reserva es una llave interruptor, que permite al usuario cambiar a protección de reserva después de que la protección principal se ha descargado con el fin de mantener el riesgo protegido. El interruptor tiene dos luces Leds. Una verde que indica que el sistema está en principal y una en rojo que indica que el sistema está en reserva. Girando la llave hacia uno u otro lado se enciende el led correspondiente. La llave se puede quitar tanto con el sistema en principal como en reserva

This main/reserve panel is a key switch, which enables a user to switch to reserve protection after the main protection has been released in order to maintain protection of that area. Two leds indicate "main" and "reserve". When the key is inserted and turned towards the "reserve", the red led illuminates and the green led indicating "main" turns off. The key can be removed either with the system in principal or in reserve.

Esquema Scheme

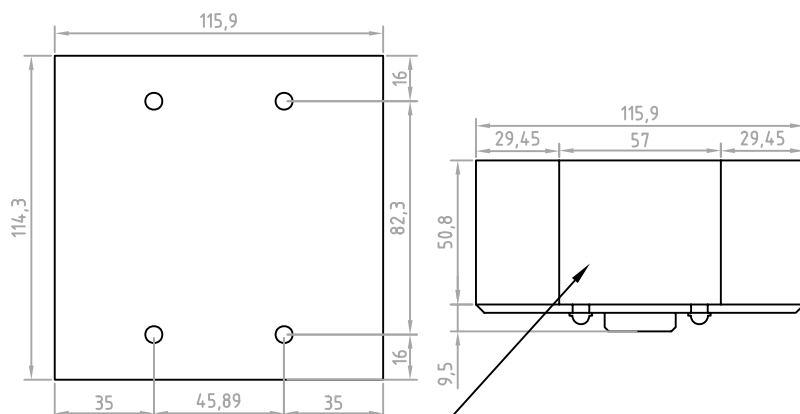


Espacio para el interruptor de contactos y Leds
Switch contacts and Led clearance

Características técnicas Characteristics technical

Interruptor nominal de / Switch rated at	10A 250VAC, 15A 125-250VAC, la calificación de DC es 15A hasta 30 VDC / the rating is 15A up to 30VDC.
Leds nominal de / Leds rated at/	10mA cada uno para un consumo total de corriente de 20 mA / 10mA each for a total current draw of 20mA..
Tornillo suministrados para el montaje / Mounting screw s supplied	(4) 6-32 x 1/2 "y (4) 6-32 x 1"

3-ESQUEMA DE CABLEADO

3-POLE WIRING DIAGRAM

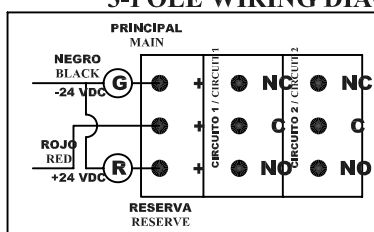

IMPORTANT: SIEX 2001 S.L. se reserva el derecho a modificar sin previo aviso cualquier dato o especificación reflejada en este documento con el propósito de realizar cambios o mejoras en los productos presentados.
IMPORTANT: SIEX 2001 S.L. reserves the right to change or modify without previous notice any data or specification due to changes or modification in order to improve the products presented.

Dibujado: Draw by:	C. Francés	Firma / Signed by	Sustituye a: Substitution to:	22-01-15	 Pol. Ind. Villalonquén C/ Merindad de Montaña, 6 (09001) Burgos - España tel.: 947 28 11 08 Fax.: 947 28 11 12
Comprobado: Check by:	J. González		Sustituido por: Sustituted by:		